

12mm Slenderline Argon




GLASS PERFORMANCE CALCULATOR

Supplied by



Product code

82 / 69 / 2.6

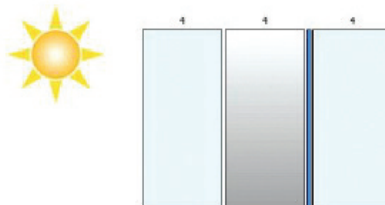

total thickness = 12 mm

Glazing from external to internal:

<p>Pane 1</p> <p>4 mm Float Glass ExtraClear</p>	<p>Pane 2</p> <p>4 mm ClimaGuard A+ Float Glass ExtraClear</p>
<p>Spacer 1 - 4 mm</p> <p>10% Air 90% Argon</p>	

Results

Visible light (EN 410 - 2011)

transmittance [%]	$\tau_v = 81.7$
reflectance external [%]	$\rho_v = 12.9$
reflectance internal [%]	$\rho_{vi} = 12.9$
general colour rendering index [%]	$R_a = 97.6$

Solar energy (EN 410 - 2011)

solar factor [%]	$g = 69.4$
shading coefficient [g/0.87]	$sc = 0.80$
direct transmittance [%]	$\tau_{e,d} = 62.9$
direct reflectance external [%]	$\rho_{e,d} = 21.8$
direct reflectance internal [%]	$\rho_{e,i,d} = 20.5$
direct absorption [%]	$a = 15.3$
UV transmittance [%]	$\tau_{uv} = 28.8$
secondary internal heat transfer factor [%]	$q_i = 6.5$

Thermal properties (EN 673 - 2011)

U-value [W/(m ² K)]	$U_g = 2.6$
slope $\alpha = 90^\circ$	

Other data

estimated sound reduction index [dB] (EN 717-1)	$R_w = \text{NPD}$ $C = \text{NPD}$ $C_{tr} = \text{NPD}$
---	---

The calculated values are for orientation only and do not offer any guarantee regarding the fabrication of the un-intended end-product. Glass configurations do not amount to a guarantee of product availability.



info@slenderlineglass.com www.slenderlineglass.com

Slenderline Glass Ltd, Unit 7 Bourne Enterprise Centre,
Wrotham Road, Borough Green, Kent TN15 8DG

Part of the EJ Cocker group.