

# 14mm Slenderline Krypton




## GLASS PERFORMANCE CALCULATOR

Supplied by



Product code

80 / 72 / 1.5

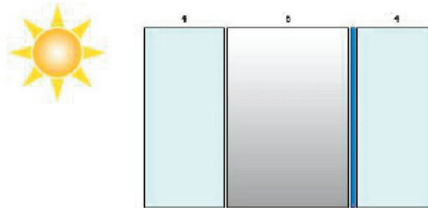

total thickness = 14 mm

Glazing from external to internal:

<p><b>Pane 1</b></p> <p>4 mm Float Glass ExtraClear</p>	<p><b>Pane 2</b></p> <p>4 mm ClimaGuard A+ Float Glass ExtraClear</p>
<p><b>Spacer 1 - 6 mm</b></p> <p>10% Air 90% Krypton</p>	

## Results

### Visible light (EN 410 - 2011)

transmittance [%]	$\tau_v = 79.6$
reflectance external [%]	$\rho_v = 13.4$
reflectance internal [%]	$\rho_v = 13.4$
general colour rendering index [%]	$R_a = 98.5$

### Thermal properties (EN 673 - 2011)

U-value [W/(m <sup>2</sup> K)]	$U_g = 1.5$
slope $\alpha = 90^\circ$	

### Solar energy (EN 410 - 2011)

solar factor [%]	$g = 72.5$
shading coefficient [g/0.87]	$sc = 0.83$
direct transmittance [%]	$\tau_e = 63.9$
direct reflectance external [%]	$\rho_e = 19.6$
direct reflectance internal [%]	$\rho_e = 18.4$
direct absorption [%]	$a = 16.5$
UV transmittance [%]	$\tau_{uv} = 35.9$
secondary internal heat transfer factor [%]	$q_i = 8.6$

### Other data

estimated sound reduction index [dB] (EN 717-1)	$R_w = \text{NPD}$ $C = \text{NPD}$ $C_{tr} = \text{NPD}$
--	---

The calculated values are for orientation only and do not offer any guarantee regarding the fabrication of the un-intended end-product. Glass configurations do not amount to a guarantee of product availability.



info@slenderlineglass.com www.slenderlineglass.com

Slenderline Glass Ltd, Unit 7 Bourne Enterprise Centre,  
Wrotham Road, Borough Green, Kent TN15 8DG

Part of the EJ Cocker group.